

RIS One & RIS Plus

The versatile ground penetrating radar solution for subsurface profiling



A configurable system combining an unsurpassed multi-channel radar controller with a large range of compact and lightweight single and dual frequency antennas

IDS GeoRadar: The Leader in Multi-frequency and Multi-channel Ground Penetrating Radar

www.idsgeoradar.com

The RIS One & RIS Plus system represents a versatile approach to the professional requirements of subsurface profiling. The system meets a wide range of needs with a large variety of antennas which can be set up in either a single or multi-channel configuration with a number of single or dual frequency antennas in a chain connection. Applications that RIS One & RIS Plus can be used for, include:


- Underground tunnel inspection and condition assessment
- Bedrock and lithological profiling
- Fracture characterization
- Ground water profiling
- Foundation and pile measurements
- Borehole investigations
- Snow and ice thickness measurements.
- River bed profiling



Borehole antenna survey

RIS ONE & RIS PLUS BENEFITS

- Compact and lightweight antennas
- Excellent data quality
- Highest flexibility in multi-channel chain connection
- High stacking thereby improving penetration depth
- Wireless link to keep track of the survey path and the location of buried objects

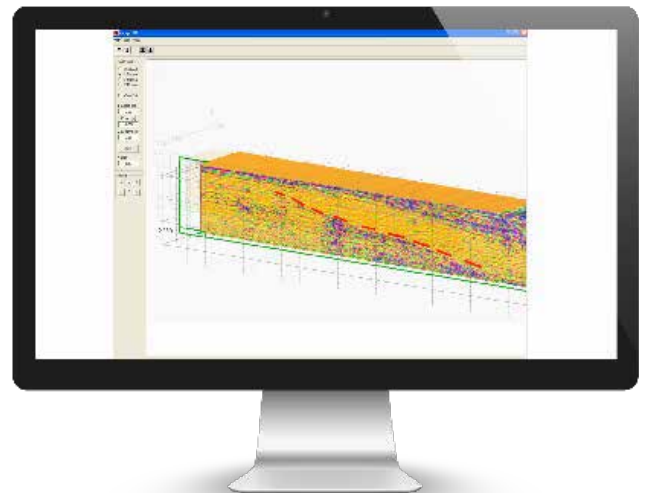

100 MHz shielded antenna results

RIS ONE & RIS PLUS FEATURES

- **The largest range of antennas in the ground penetrating radar arena:** IDS GeoRadar have a comprehensive set of antennas from 25 MHz to 3 GHz, including multi-frequency, borehole and horn antennas ensuring that the right equipment is available for the right application.
- **More than 8 hours of autonomous use:** IDS GeoRadar's radar control unit has the lowest power consumption in the ground penetrating radar market.
- **Flexible:** The multi-channel DAD control unit can drive any IDS GeoRadar antenna and up to 8 antennas in a chain connection simultaneously enabling the use of custom configurations.



Survey with a low frequency antenna at a mine


RIS ONE & RIS PLUS CONFIGURATION

RIS One & RIS Plus is a configurable system driven by a single or multi-channel DAD FastWave control unit providing a high stacking factor which enables an increased acquisition speed and improved penetration depth. A large range of antennas is available from 25 MHz to 3 GHz including multi-frequency and borehole antennas. Up to 8 antennas or 4 dual frequency antennas can be powered by a single control unit and a cluster of 4 control units can be used to power up to 32 antennas. A variety of survey kits is available, from backpacks to trolleys, for operations in all kinds of environmental conditions.



| SYSTEM SPECIFICATIONS | | SOFTWARE SPECIFICATIONS | |
|-----------------------------|---|-----------------------------|--|
| RECOMMENDED LAPTOP | Panasonic CF-19 Tough-Book | GRED HD basic GRED HD 3D | <ul style="list-style-type: none"> Tomographic map view (C-Scan) including radar scan fusion 3D data visualization Advanced targeting using radarscan and tomographic view Radarscan viewer, filter and advanced filtering macros, multiple radar scan viewer Layer picking for automatic analysis of sub-layers GPS and map track viewer including X, Y and Z axis and digital map importation Video handling (option) |
| MAX. ACQUISITION SPEED | Depends on the number of antennas and scan rate | | |
| POWER CONSUMPTION | Depends on the configuration, from 10 W to 40 W | | |
| POSITIONING | Survey wheel and/or GPS or total station | | |
| NUMBER OF CONTROL UNIT | From 1 to 4 | | |
| COLLECTION SPEED | Depends on the number of antennas | | |
| SCAN INTERVAL | Depends on the number of antennas | | |
| POWER SUPPLY | SLA Battery 12 VDC 12 AH | | |
| ANTENNA SPECIFICATIONS | | | |
| ENVIRONMENTAL | IP65 | | |
| ANTENNA FOOTPRINT | Depends on the antenna | | |
| NUMBER OF HARDWARE CHANNELS | 8 or 32 with a cluster of 4 DAD MCH | | |
| ANTENNA CENTER FREQUENCIES | From 25 MHz to 3 GHz | | |
| CERTIFICATION | Depends on the antenna | | |

* This antenna is not FCC or IC approved for use in the USA or Canada



IDS GeoRadar Srl

Via Enrica Calabresi 24, 56121 Pisa (PI) Italy
Tel. +39 050 3124 501 Fax +39 050 3124 205
www.idsgeoradar.com
info@idsgeoradar.com